



3.16

INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

*Stephen Hendley*

Dated 15 January 2002

CERTIFIED COPY OF  
PRIORITY DOCUMENT

**THIS PAGE BLANK (USPTO)**

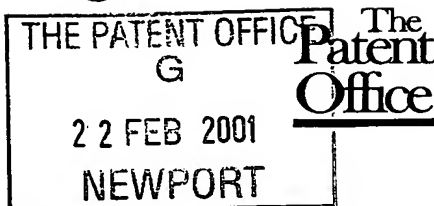

22FEB01 E608025-2,001063  
P01/7700 0.00-0104332.2

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

22 FEB 2001

1. Your reference RL.P51471GB

2. Patent application number  
(The Patent Office will fill in this part)

**0104332.2**

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Mitel Semiconductor Limited  
Cheney Manor  
Swindon  
Wilts SN2 2QW

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

UK (AIL 16-3-01)

7357442001

4. Title of the invention SERIAL DATA TRANSMITTERS

5. Name of your agent (if you have one)

Marks & Clerk  
4220 Nash Court  
Oxford Business Park South  
Oxford  
OX4 2RU

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

7271125001

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	None
Description	6
Claim(s)	2
Abstract	1
Drawing(s)	2 <i>tr fl</i>

10. If you are also filing any of the following, state how many against each item.

Priority documents	No
Translations of priority documents	No
Statement of inventorship and right to grant of a patent ( <i>Patents Form 7/77</i> )	1
Request for preliminary examination and search ( <i>Patents Form 9/77</i> )	1
Request for substantive examination ( <i>Patents Form 10/77</i> )	No
Any other documents ( <i>please specify</i> )	No

11. I/We request the grant of a patent on the basis of this application.

Signature *Marks & Clerk* Date 21 February 2001  
Marks & Clerk


12. Name and daytime telephone number of person to contact in the United Kingdom Robert Lind - 01865 397900

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- b) *Write your answers in capital letters using black ink or you may type them.*
- c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- d) *If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- e) *Once you have filled in the form you must remember to sign and date it.*
- f) *For details of the fee and ways to pay please contact the Patent Office.*

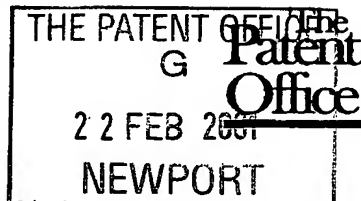

7/77

**Statement of inventorship and of  
right to grant of a patent**

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

22 FEB 2001

1. Your reference RL.P51471GB

2. Patent application number  
(if you know it)

0104332.2

3. Full name of the or of each applicant

Mitel Semiconductor Limited

4. Title of the invention

SERIAL DATA TRANSMITTERS

5. State how the applicant(s) derived the right  
from the inventor(s) to be granted a patent

By virtue of employment

6. How many, if any, additional Patents Forms None  
7/77 are attached to this form?  
(see note (c))

7. I/We believe that the person(s) named over the page (and on  
any extra copies of this form) is/are the inventor(s) of the invention  
which the above patent application relates to.

Signature *Marks & Clerk* Date  
Marks & Clerk 21 February 2001

8. Name and daytime telephone number of  
person to contact in the United Kingdom

Robert Lind - 01865 397900

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

**Patents Form 7/77**

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Geoffrey Edward Floyd  
25 Chapel Meadow  
Buckland Monachorum  
Yelverton  
Devon  
PL20 7LR

56058942001

Patents ADP number (if you know it):

Patents ADP number (if you know it):

**Reminder**

**Have you signed the form?**

Patents ADP number (if you know it):

### Serial Data Transmitters

The present invention relates to serial data transmitters and more particularly to a  
5 queuing system for serial data transmitters using time division multiplexing.

Time division multiplexing (TDM) is a mechanism commonly used for sharing  
resources on a communication link. Consider for example a single cable connecting  
multiple voice or data channels between call switches. The link is divided in time into  
10 successive frames of equal duration. Each frame is further sub-divided in time into a  
sequence of slots (numbered 0 to n), where each slot can accommodate 8 bits. The  
number of slots in a frame is determined by the data rate of the link and the duration of  
the frame. Multiple channels are formed on a data stream by allocating respective slot  
numbers to channels. Thus, a first channel (CH0) is formed from the set of first slots in  
15 successive frames, a second channel (CH1) is formed from the set of second slots in  
successive frames, etc.

Data is provided to a TDM serial data transmitter from a source (referred to hereinafter  
as an "external" memory because it does not form part of the serial data transmitter *per*  
20 *se*). Data is temporarily stored at the serial data transmitter in a set of data queues, one  
for each "context". Each context comprises a plurality of buffers (e.g. three). Figure 1  
illustrates schematically the architecture of a part of a TDM serial data transmitter. A  
TDM interface 1 provides data requests at regular intervals to a context lookup table 2.  
The lookup table maintains a mapping between TDM channel numbers and "context"  
25 numbers. The lookup table 2 cycles through the contexts as data requests are received,  
and passes context numbers to a data cache 3. The next data block in the identified  
context is read from the appropriate buffer and passed to the TDM interface. When a  
buffer belonging to a context is empty, a refill request is made via a memory interface 4  
to the external memory 5. For a given context, one, two, or three buffers may be empty  
30 at a given time, in which case a corresponding number of buffer fill requests are  
outstanding.

The following table shows an example lookup table for a serial stream having 24 channels, and making use of 7 contexts:

TDM Channel	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Context Number	1	2	3	4	5	6	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7

In this example, channels 0 to 5 are mapped onto context numbers 1 to 7, whilst channels 6 to 23 are all mapped to context 7. It will be appreciated that the buffers of context 7 will be emptied at a much higher rate than those of contexts 1 to 6. This may give rise to problems in refilling the buffers of context 7 at a high enough rate. This is because the data cache 3 and memory interface 4 treat all context refill requests with equal priority. In a worst case scenario, and using the above example, buffers of context 1 to 6 are empty and refill requests made, when one or more buffers of context 7 becomes empty. If the refill request for context 7 is not satisfied quickly enough, the entire context may be emptied so that there is no data available for channels 6 to 23. This causes a break in the data transmitted over the TDM link which is not permitted.

According to a first aspect of the present invention there is provided a method of providing data for transmission on a time division multiplexed (TDM) serial data stream, the method comprising:

- mapping channels of the TDM stream to contexts, each context comprising a set of memory buffers for storing data to be transmitted;
- extracting data from the contexts in a sequence defined by said mapping and transmitting the extracted data on the TDM stream;
- when a buffer or buffers of a context become empty, generating a buffer refill request to cause data to be read from a memory to refill the buffer, wherein each buffer refill request is assigned a priority; and
- handling buffer refill requests according to their relative priorities to refill the context buffers.

When employing embodiments of the invention, it is less likely that a context will become completely empty as refill requests associated with contexts which are almost



completely empty will tend to be prioritised ahead of those associated with contexts which still have significant fill levels.

5 In one embodiment of the present invention, the priority assigned to a buffer refill request depends upon the number of buffers of the corresponding context which are empty.

10 In another embodiment of the invention, the priority assigned to a buffer refill request depends upon the priorities of outstanding buffer refill requests for other buffers of the same context. More preferably, priorities are allocated to the fill requests on a first come first served basis, with a request being allocated the lowest unallocated priority. Once a refill request has been satisfied, the priority of that request is available for allocation to a subsequent request. An advantage of this approach is that when the TDM transmitter is first switched on (a condition in which all buffers of a context will  
15 be empty), the entity which handles the refill requests is not overloaded with high priority requests.

In a preferred embodiment of the present invention, the buffer refill requests are generated by a data cache which provides said contexts, and are passed to a memory  
20 interface which is responsible for reading data from said memory to refill the buffers. The memory interface places the refill requests in a handling queue according to their relative priorities.

According to a second aspect of the present invention there is provided a serial data  
25 transmitter for transmitting data on a time division multiplexed (TDM) serial data stream, the transmitter comprising:

a data cache arranged in use to provide a set of contexts, each context comprising a set of memory buffers for storing data to be transmitted

means for storing a mapping of TDM channels to contexts;

30 first processing means for extracting data from the contexts in a sequence defined by said mapping and for transmitting the extracted data on the TDM stream;

second processing means for generating a buffer refill request to cause data to be read from a memory to refill a buffer when a buffer or buffers of a context become empty, and for assigning each buffer refill request a priority; and

5 third processing means for handling the buffer refill requests and for refilling the context buffers.

It will be appreciated that the means for storing a mapping of TDM channels to contexts may be a memory device or may be implemented in hardware. The first, second, and third processing means may be provided by a single processor (e.g. a microprocessor or  
10 ASIC) or may each comprise a separate processor. The processor(s) may be supported by memory.

In a preferred embodiment of the present invention, the data cache, means for storing a mapping of TDM channels to contexts, first processing means, second processing  
15 means, and third processing means, are integrated into a single device.

According to a third aspect of the present invention there is provided a switch for coupling a TDM network to a packet switched network, the switch comprising a TDM transmitter according to the above second aspect of the present invention.

20

For a better understanding of the present invention and in order to show how the same may be carried into effect reference will now be made, by way of example, to the accompanying drawings, in which:

25 Figure 1 illustrates schematically a part of a time division multiplexed serial data transmitter; and

Figure 2 is a flow diagram illustrating a method of refilling contexts within a data cache of the transmitter of Figure 1.

30 That part of a TDM serial data transmitter comprising the data cache (for providing the contexts) and means for extracting data from and writing data to the data cache has been described with reference to Figure 1. For the purpose of describing an embodiment of the present invention reference will again be made to Figure 1. It is assumed that the

functions of the TDM interface, context lookup table, and external memory remain unchanged. Data requests are passed via the TDM interface to the context lookup table. The context lookup table cycles through the contexts according to the channel/context mapping defined there. As it is not possible to predict in advance how many TDM  
5 channels will be allocated to a given context, a mechanism should be provided for flexibly dealing with changing context priorities.

Considering the data cache, this provides a number of buffers for each context. For example, each context may have three buffers. When a data request is passed to the  
10 data cache (the request identifying a context), the next data block (word) is extracted from one of the buffers. A counter is used to keep track of the "next" location for each context.

Using the corresponding counter, the data cache detects when any of the buffers of a  
15 context become empty. For each context, a number of priority levels are available for allocation to buffer refill requests passed to the memory interface – the number of priority levels corresponds to the number of buffers, e.g. three in the present example. The priority levels are allocated on a first come first served basis, with a given refill request being allocated the lowest unallocated priority. Thus for example when a first  
20 buffer of a context becomes empty, the corresponding refill request will be allocated a priority level 1 (ie. low). If a second buffer becomes empty while the first buffer remains empty, the second refill request will be allocated a priority level 2 (ie. medium), etc. It may happen for example that a refill requests having priority levels of 1 (low) and 3 (high) are outstanding, in which case when the third buffer becomes empty the  
25 corresponding refill request will be allocated a priority level 2 (as that is the lowest unallocated priority).

The buffer refill request containing the priority level is passed from the data cache to the memory interface. The memory interface places a refill request in a queue  
30 corresponding to the priority level of the request. Requests in the level 3 queue are dealt with ahead of requests in the level 1 and 2 queues, whilst requests in the level 2 queue are dealt with ahead of requests in the level 1 queue. The memory interface deals with a refill request by reading a block of data from an external (or internal) memory.

The read data block is passed to the data cache, where it is written into the appropriate buffer. The memory cache updates the empty buffer record for the context. The priority level allocated to the satisfied request is then made available for a subsequent request.

5

Figure 2 is a flow diagram illustrating the method of refilling the context buffers described above.

It will be appreciated that various modifications may be made to the above described embodiment without departing from the scope of the present invention. For example, the number of contexts and channels may be changed. The number of buffers available to each context may also change. The invention may be employed in a serial data transmitter transmitting a plurality of data streams. In this case, the context lookup table will map contexts to channels of all available streams.

15

**CLAIMS:**

1. A method of providing data for transmission on a time division multiplexed (TDM) serial data stream, the method comprising:
  - 5 mapping channels of the TDM stream to contexts, each context comprising a set of memory buffers for storing data to be transmitted;  
extracting data from the contexts in a sequence defined by said mapping and transmitting the extracted data on the TDM stream;  
when a buffer or buffers of a context become empty, generating a buffer refill request to cause data to be read from a memory to refill the buffer, wherein each buffer refill request is assigned a priority; and  
10 handling buffer refill requests according to their relative priorities to refill the context buffers.
- 15 2. A method according to claim 1, wherein the priority assigned to a buffer refill request depends upon the number of buffers of the corresponding context which are empty.
- 20 3. A method according to claim 1, wherein the priority assigned to a buffer refill request depends upon the priorities of outstanding buffer refill requests for other buffers of the same context.
4. A method according to claim 3, wherein priorities are allocated to the fill requests on a first come first served basis, with a request being allocated the lowest  
25 unallocated priority, and once a refill request has been satisfied, the priority of that request is available for allocation to a subsequent request.
5. A method according to any one of the preceding claims, wherein the buffer refill requests are generated by a data cache which provides said contexts, and are passed to a  
30 memory interface which is responsible for reading data from said memory to refill the buffers.

6. A method according to claim 5, wherein the memory interface places the refill requests in a handling queue according to their relative priorities.

7. A serial data transmitter for transmitting data on a time division multiplexed (TDM) serial data stream, the transmitter comprising:

a data cache arranged in use to provide a set of contexts, each context comprising a set of memory buffers for storing data to be transmitted

means for storing a mapping of TDM channels to contexts;

first processing means for extracting data from the contexts in a sequence defined by said mapping and for transmitting the extracted data on the TDM stream;

second processing means for generating a buffer refill request to cause data to be read from a memory to refill a buffer when a buffer or buffers of a context become empty, and for assigning each buffer refill request a priority; and

third processing means for handling the buffer refill requests and for refilling the context buffers.

8. A transmitter according to claim 7, wherein the data cache, means for storing a mapping of TDM channels to contexts, first processing means, second processing means, and third processing means, are integrated into a single device.

9. A switch for coupling a TDM network to a packet switched network, the switch comprising a TDM transmitter according to claim 8.

**ABSTRACT**  
**Serial Data Transmitters**

A method of providing data for transmission on a time division multiplexed (TDM) serial data stream. The method comprises mapping channels of the TDM stream to contexts, each context comprising a set of memory buffers for storing data to be transmitted. Data is extracted from the contexts in a sequence defined by said mapping and transmitting the extracted data on the TDM stream. When a buffer or buffers of a context become empty, a buffer refill request is generated to cause data to be read from a memory to refill the buffer, wherein each buffer refill request is assigned a priority. The context buffers are refilled in an order defined by the respective priorities of the refill requests.

Figure 1

**THIS PAGE BLANK (USPTO)**



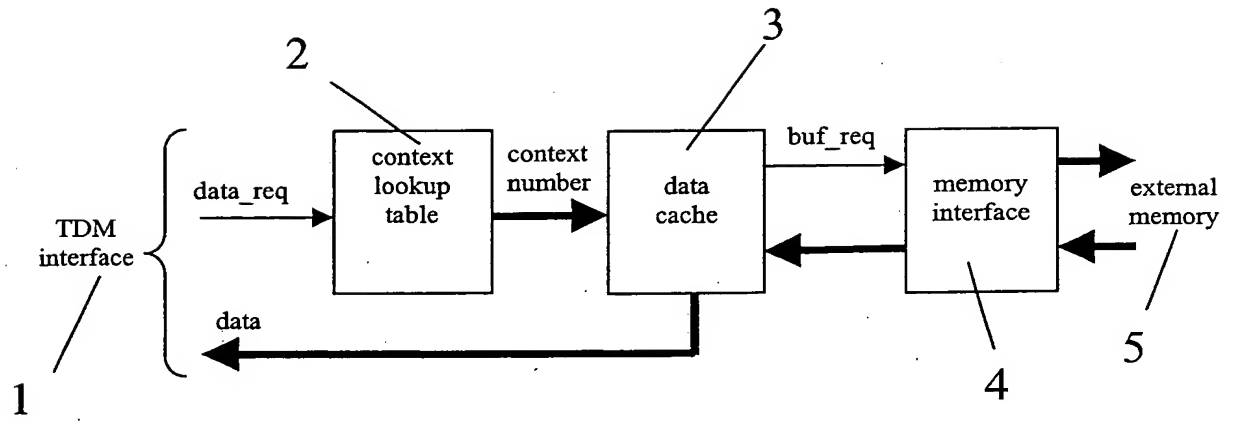
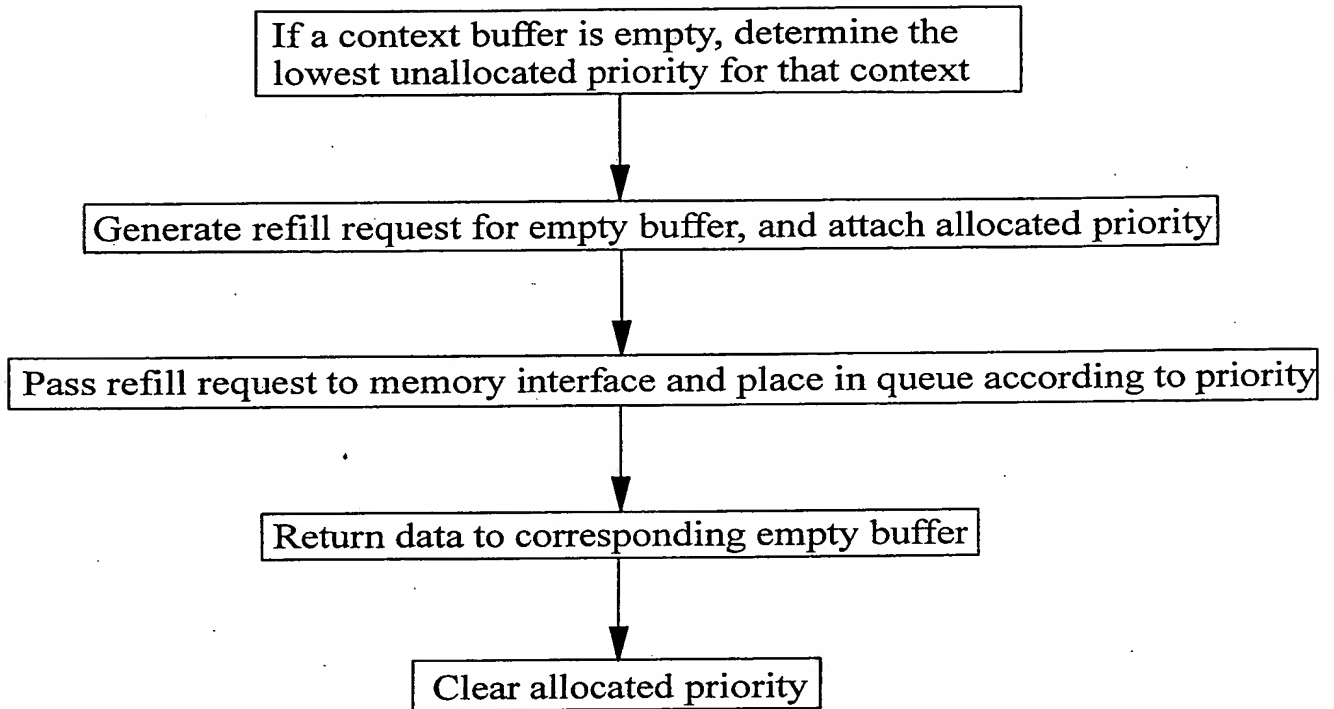


Figure 1

**THIS PAGE BLANK (USPTO)**

Figure 2

**THIS PAGE BLANK (USPTO)**